


Printer Parts

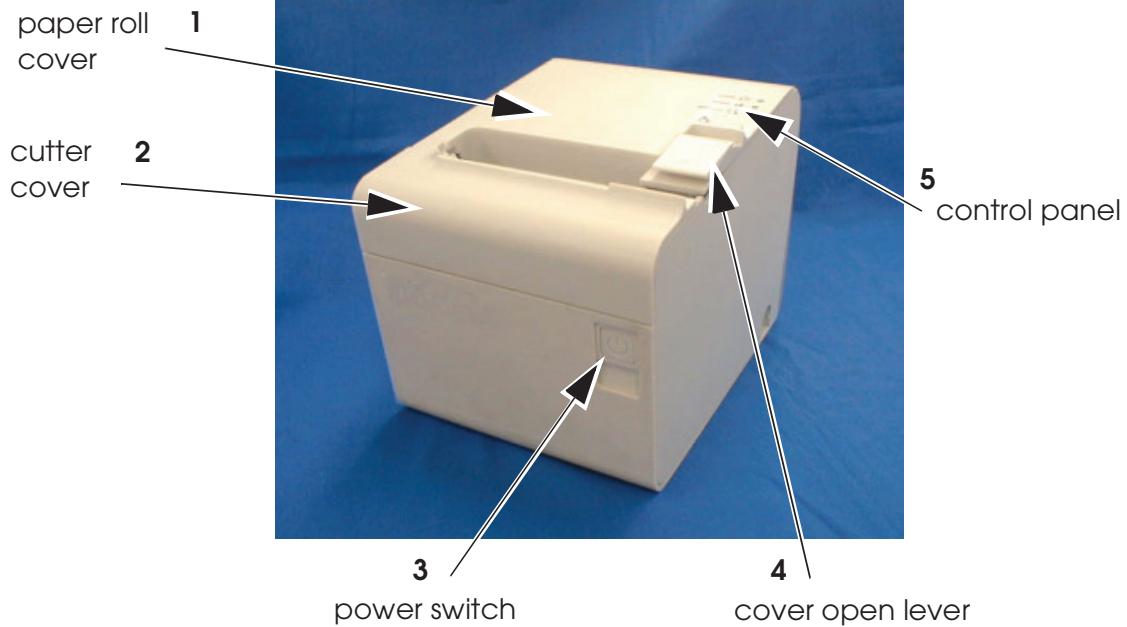

DIP Switch Tables

Serial

SW	Function	ON	OFF
1-1	Power switch function	Disabled	Enabled
1-2	Interface condition selection	by DIP switch	by memory switch
1-3	Handshaking	XON/XOFF	DTR/DSR
1-4	Data word length	7 bits	8 bits
1-5	Parity check	Enabled	Disabled
1-6	Parity selection	Even	Odd
1-7 1-8	Transmission speed (See table below.)		
2-1	Reserved	Fixed to Off.	

Transmission speed (bps)-bits per second	1-7	1-8
2400	ON	ON
4800	OFF	ON
9600	ON	OFF
19200	OFF	OFF

Parallel

SW	Function	ON	OFF
1-1	Power switch function	Disabled	Enabled
1-2~ 1-8	Reserved	Fixed to Off.	
2-1	Reserved	Fixed to Off.	